


LUXNERI® SERIES 4

390-410W Mono ALL BLACK

M6/166mm Cell . 132 Half-Cell Layout



Assembled with the M6 wafer based high efficiency cells, LUXNERI® Series 4 ALL BLACK solar modules combine the impressive aesthetic appearance with the innovative twin-panel design and the advanced technologies of half-cut cell, 9 busbars and round wire ribbon interconnection. The perfect visual effect, together with the high power generation performance and the reduced hot spot and shading risks, make it ideal for residential rooftop application.

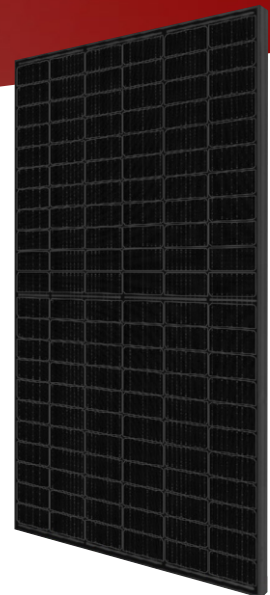

Full Black Appearance for Aesthetic Effect



Gallium-doped Technology



Half Cut Cell Technology



Anti-PID Low LID Performance




Less Hot Spot Shading Effects



Ideal for Residential Rooftop Application

Linear performance Warranty

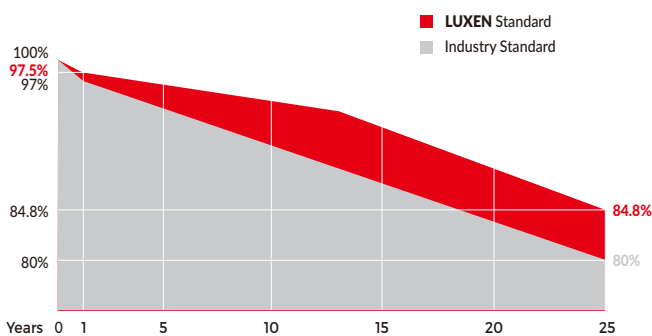


Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard quality



MECHANICAL CHARACTERISTICS

Solar Cells	Mono
No. of Cells	132 (6x22)
Dimensions	1925 x 1039 x 35mm
Weight	21.0kgs
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
	4.0mm ²
Output Cables	300mm (+) / 300mm (-)
	Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa

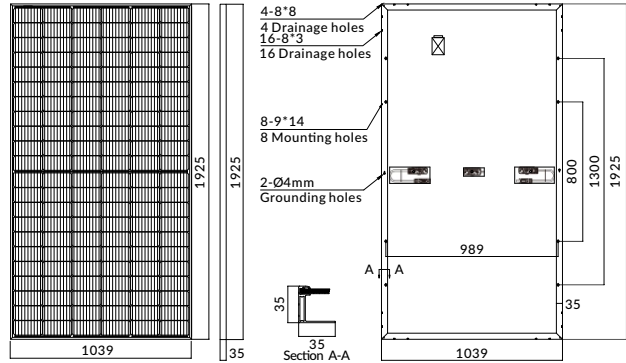

ELECTRICAL PARAMETERS

POWER CLASS	LNST-390M		LNST-395M		LNST-400M		LNST-405M		LNST-410M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power (Pmax)	390W	284W	395W	287W	400W	290W	405W	293W	410W	296W
Open Circuit Voltage (Voc)	45.33V	38.89V	45.56V	38.97V	45.79V	39.03V	46.01V	39.10V	46.23V	39.17V
Short Circuit Current (Isc)	11.13A	9.41A	11.19A	9.47A	11.26A	9.53A	11.32A	9.59A	11.39A	9.65A
Voltage at Maximum power (Vmpp)	36.69V	31.70V	36.93V	31.82V	37.17V	31.94V	37.41V	32.06V	37.64V	32.17V
Current Maximum Power (Impp)	10.63A	8.96A	10.70A	9.02A	10.76A	9.08A	10.83A	9.14A	10.89A	9.20A
MODULE EFFICIENCY (%)	19.50%		19.75%		20.00%		20.25%		20.50%	



STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G NOCT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G

PACKING CONFIGURATION

Container	20'GP	40'HQ
Pieces per pallet	31	31
Pallets per container	6	24
Pieces per container	186	744

I-V CURVE

LNST-410M/I-V

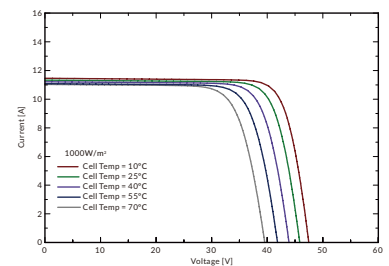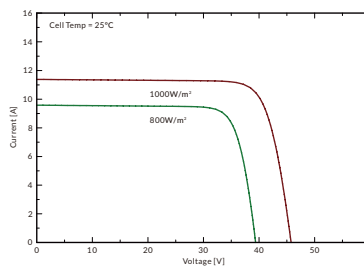

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	20A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (Noct)	45±2°C
Temperature Coefficient of Pmax	-0.36%/°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Isc	+0.05%/°C

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LUXEN SOLAR have the sole right to make such modification at anytime without further notice.